


Main specifications

Parameters	Frequency	/	Min	Typical	Max	Units
Passband	/	/	20 20	~	20 80	MHz
Passband IL	/	/			0.7	dB
Ripple	/	/			0.5	dB
Rejection	DC-1750	MHz $\geq$	50			dB
Rejection	2350-5000	MHz $\geq$	50			dB
Passband VSWR	/	/			1.3	

Other parameters

Connector	SMA-K
Impedance	50 Ω
Surface	silver-plate
Operation Temp.	-40~+70°C Design assurance

Configuration(mm)

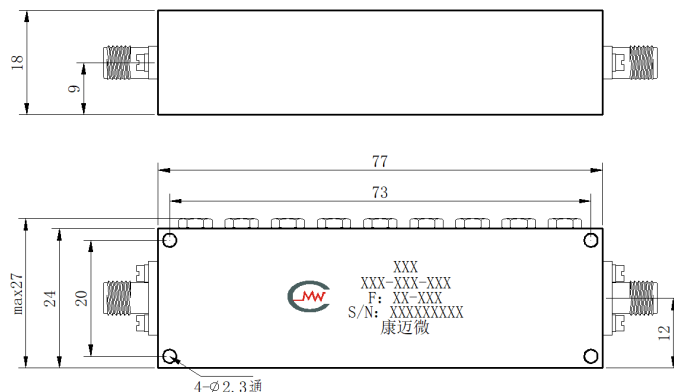

Note

- 1 Clean the surface of the product, do not soak the product in cleaning solution for cleaning.