

Product features

It has the characteristics of wide bandwidth, low sidelobes, and high efficiency.

Main specifications

Parameters	Min	Typical	Max	Units
Frequency	32	~	38	GHz
Beam gain	2			dBi
VSWR		1.6		
Beam width (azimuth * elevation)		90*80		°


Reference picture



Other parameters

Polarization	Vertical polarization
Power Capacity	25W Design assurance
Connector	2.92-K
Outline size	36*19.1*19.1mm
Estimated weight	35g
surface treatment	Black matte finish
Operation Temp.	-45~+65°C Design assurance
Storage Temp.	-55~+75°C Design assurance

Configuration(mm)

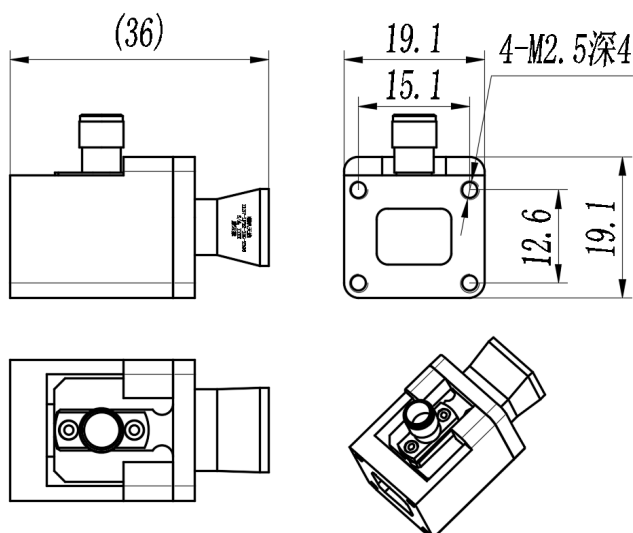

Note: The specifications and performance data contained in this data sheet are based on tests established by CMW.

Note

It is strictly prohibited to disassemble antenna accessories, as it may cause poor antenna performance.

The installation position of the antenna should be free of any obstacles.

Outdoor use should be equipped with lightning protection facilities.

May contain electronic components, please do not dispose of them randomly.