

Main specifications

Parameters	Min	Typical	Max	Units
Frequency	0	~	67	GHz
Attenuation	4	5	6.5	dB
VSWR			1.6	


Reference picture





Other parameters

Power Capacity	2W Design assurance
Peak power	100W design guarantee, duty cycle 1%, pulse width 1us
Impedance	50Ω
Connector	1.85-MF or JK
Connector material	Stainless steel 303
Product shell material	Stainless steel 303
Operation Temp.	-55~+125°C Design assurance
Weight	5g
ROHS	Compliant Available

Configuration(mm)

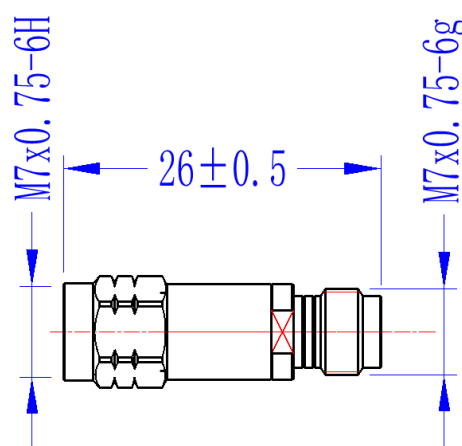

Typical test curve

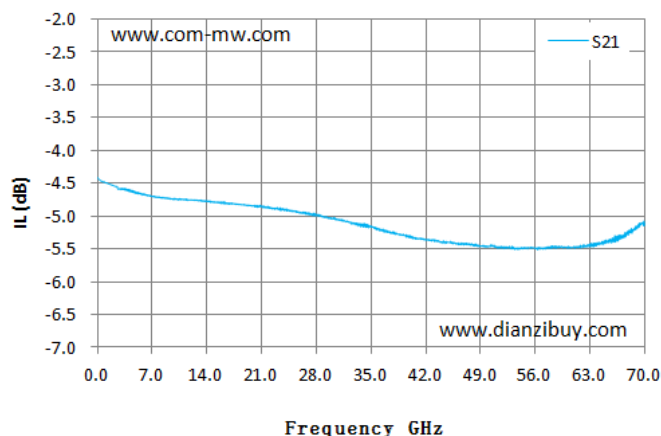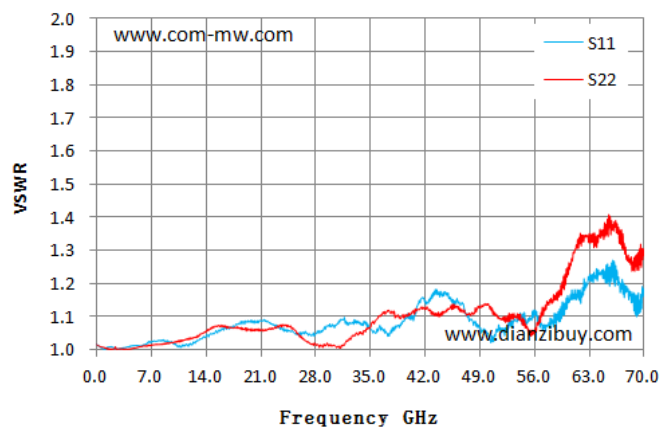


Typical test data

Frequency GHz	S11 VSWR	S22 VSWR	S21 IL dB
0.01	1.02	1.02	-4.43
5.01	1.01	1.01	-4.65
10.01	1.02	1.02	-4.75
15.01	1.05	1.07	-4.80
20.01	1.08	1.06	-4.85
25.01	1.06	1.06	-4.93
30.01	1.07	1.01	-5.04
35.01	1.07	1.06	-5.16
40.00	1.11	1.11	-5.33
45.00	1.17	1.12	-5.40
50.00	1.05	1.14	-5.46
55.00	1.08	1.07	-5.50
60.00	1.13	1.22	-5.48
65.00	1.22	1.37	-5.36
70.00	1.18	1.28	-5.14

Note: The specifications and performance data contained in this data sheet are based on tests established by CMW.

Power Derating Curve

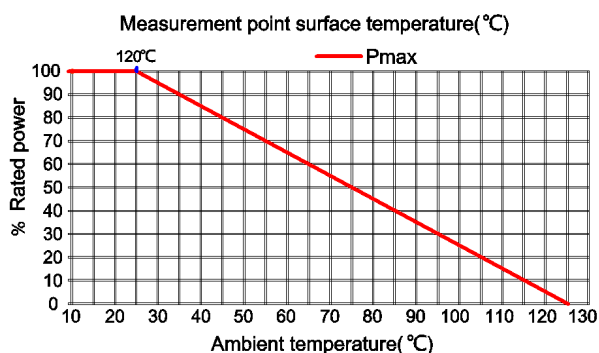

Note

1. When installing attenuators, it is necessary to consider sufficient heat dissipation space and avoid installing them next to equipment with high heat output, otherwise the power capacity will decrease;
2. Small power attenuators do not have input and output directions, nor do they indicate directions. When high-power attenuators have input and output port markings, they must be connected to the equipment in the specified direction, otherwise the attenuator may burn out.