


Main specifications

Parameters	Frequency	/	Min	Typical	Max	Units
Passband	/	/	13.43	~	14.27	GHz
Passband IL	/	/			2	dB
Ripple	/	/			1	dB
Flatness in band	peak	/			0.5	dB
Rejection	14.4-14.56	GHz ≥	40			dB
Rejection	DC-12.9	GHz ≥	70			dB
Rejection	14.45-17	GHz ≥	70			dB
Passband VSWR	/	/			1.5	


Other parameters

Connector	Pin 0.38mm
Impedance	50Ω
Surface	Silver plating
Power	10W Design assurance
Work Temp.	-40~+70°C Design assurance
Storage Temp.	-55~+85°C Design assurance
Quality Grade	Industrial grade


Functional diagram

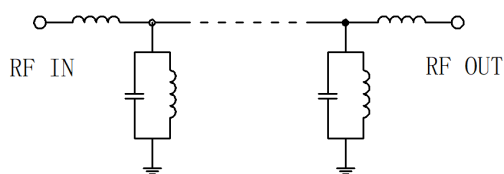

Configuration(mm)

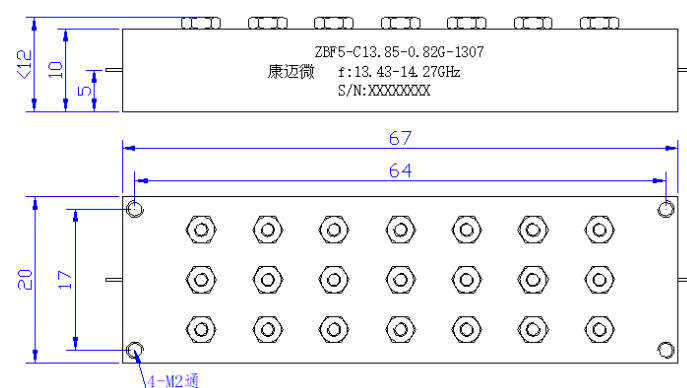

Typical test curve

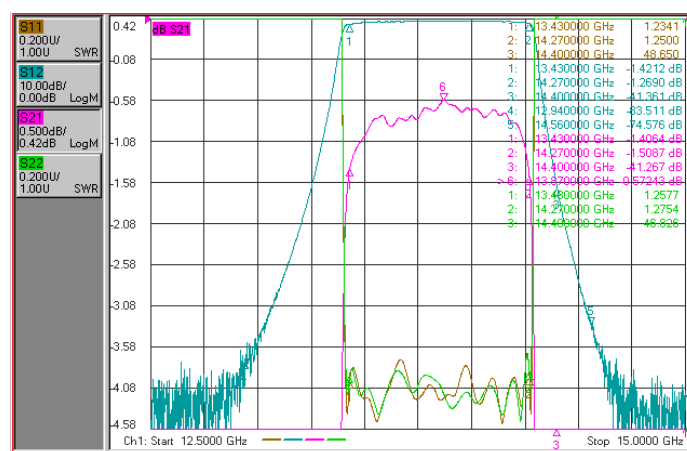

Note

- Please do not wash the product in the cleaning solution.,Please do not wash the product in the cleaning solution.
- If the temperature is higher than 125°C, consult with us before ordering.