


Main specifications

Parameters	Frequency	/	Min	Typical	Max	Units
Passband	/	/	16175	~	16225	MHz
Passband IL	/	/			9	dB
Ripple	/	/			6	dB
Rejection	$F_0 \pm 30$	MHz $\geq$	3			dB
Rejection	$F_0 \pm 50$	MHz $\geq$	30			dB
Rejection	$F_0 \pm 100$	MHz $\geq$	60			dB
Passband VSWR	/	/	1.5			

Configuration(mm)

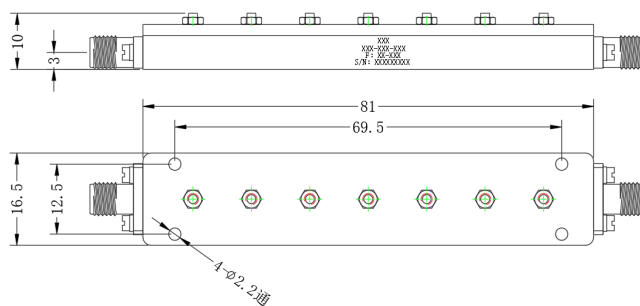

Other parameters

Connector	SMA-F or K Detachable Pin 0.38mm
Impedance	50Ω
Surface	silver-plate
Power Capacity	5W Design assurance
Operation Temp.	-30~+70°C Design assurance
Storage Temp.	-45~+85°C Design assurance

Note: The specifications and performance data contained in this data sheet are based on tests established by CMW.