


Main specifications

Parameters	Frequency	/	Min	Typical	Max	Units
Passband	/	/	765	~	775	MHz
Passband IL	/	/			1	dB
Rejection	DC-755	MHz $\geq$	55			dB
Rejection	785-2000	MHz $\geq$	55			dB
Passband VSWR	/	/			1.3	

Configuration(mm)

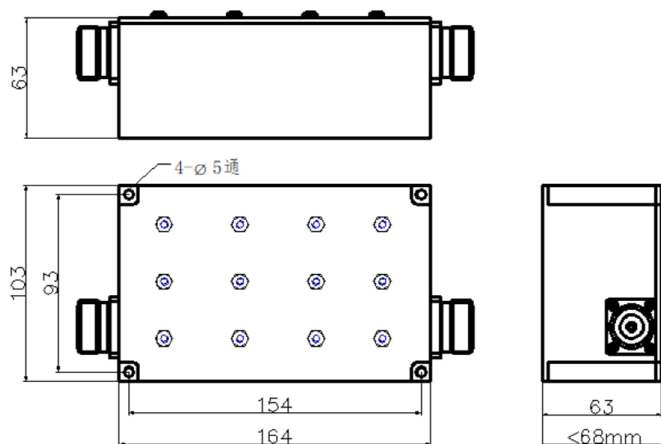

Other parameters

Connector	L29-F
Impedance	50 Ω
Surface	silver-plate
Power Capacity	150W Design assurance
IM3	-150dBc@2*43dBm Design assurance
Operation Temp.	-10~+50°C Design assurance