

Product features

Small size, high power, wide bandwidth and cost-effective.

Main specifications

Parameters	Min	Typical	Max	Units
Frequency	30	~	3000	MHz
Clipping level			17	dBm
IL			1.2	dB
VSWR			1.5	


Other parameters

Power	20W
Impedance	50Ω
Connector	SMA-K detachable, Pin 0.5mm
Surface	Conductive oxidation
Product shell material	Aluminium
Work Temp.	-40~+85°C Design assurance
Other	With feeding interface: 200mA @+5V

Reference picture



Configuration(mm)

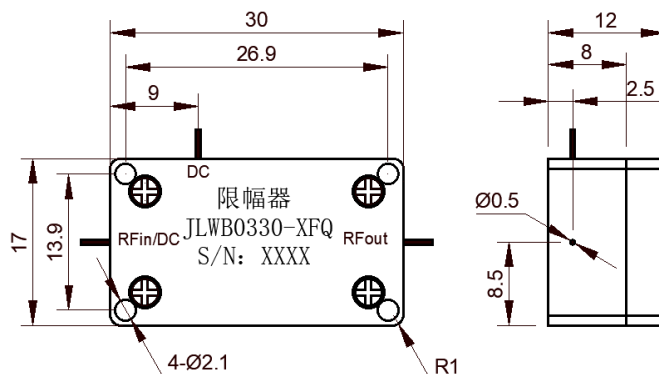

Note

1, Pay attention to the direction of input and output, reverse connection may cause the product to burn out.