

Product features

Broadband, high-power.

Tech specifications

Parameters	Min	Typical	Max	Units
Frequency	DC	~	3	GHz
IL			0.2	dB
Isolation	70			dB
VSWR			1.2	


Other parameters

Switch way	SPDT
Control	Manual switch
Switching characteristic	Mechanical reflective
Switch time	ns
Connector	N -K
Impedance	50Ω
Power Capacity	600W
Operation Temp.	-30~+70°C Design assurance
Switching Lifetime	100000 Cycles

Port Definition

Common port	C
Branching port	1, 2

Configuration(mm)

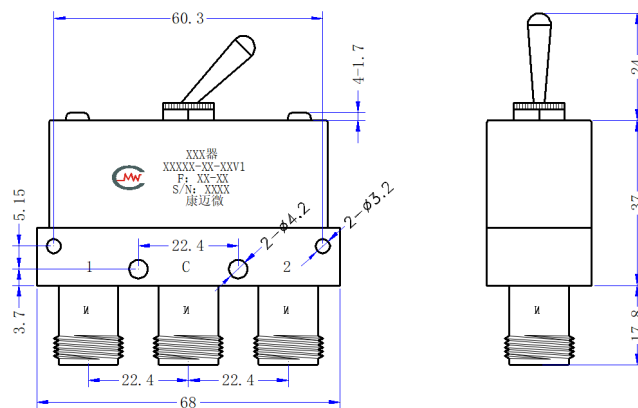

Note

- 1 Clean the surface of the product, do not soak the product in cleaning solution for cleaning.
- 2 If the temperature is higher than 125°C, consult with us before ordering.