


Main specifications

Parameters	Frequency	/	Min	Typical	Max	Units
Passband	/	/	950	~	1250	MHz
Passband IL	/	/			1.5	dB
Ripple	/	/			0.5	dB
Rejection	400-800	MHz ≥	65			dBc
Rejection	1.5-4.5	GHz ≥	65			dBc
Rejection	4.5-9	GHz ≥	30			dBc
Passband VSWR	/	/			1.6	

Other parameters

Connector	Pin 0.38mm
Impedance	50Ω
Surface	silver-plate
Power Capacity	1W Design assurance
Operation Temp.	-55~+85°C Design assurance
Storage Temp.	-55~+85°C Design assurance

Configuration(mm)

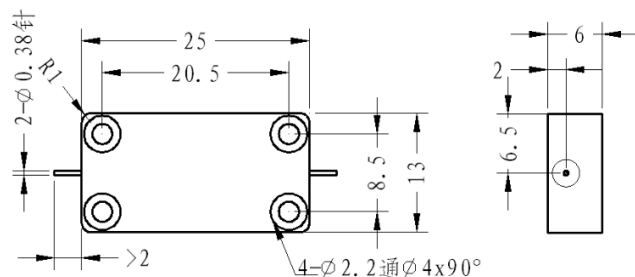

Note

- 1 Clean the surface of the product, do not soak the product in cleaning solution for cleaning.
- 2 If the temperature is higher than 125°C, consult with us before ordering.