

Main specifications

Parameters	Frequ ency	/	Mi n	Typi cal	Ma x	Uni ts
Passband	/	/	20 50	~	20 90	MH z
Passband IL	/	/			2.0	dB
Ripple	/	/			0.3	dB
Rejection	DC-2	GHz $\geq$	25			dBc
Rejection	2.2-2.3	GHz $\geq$	35			dBc
Rejection	2.3-6	GHz $\geq$	50			dBc
Passband VSWR	/	/			1.5 0	


Other parameters

Connector	Pin 0.5mm
Impedance	50 Ω
Surface	silver-plate
Power Capacity	10W Design assurance
Delay ripple	$\leq$ 1.1ns
Operation Temp.	-40~+70°C Design assurance
Storage Temp.	-55~+85°C Design assurance

Reference picture



Configuration(mm)

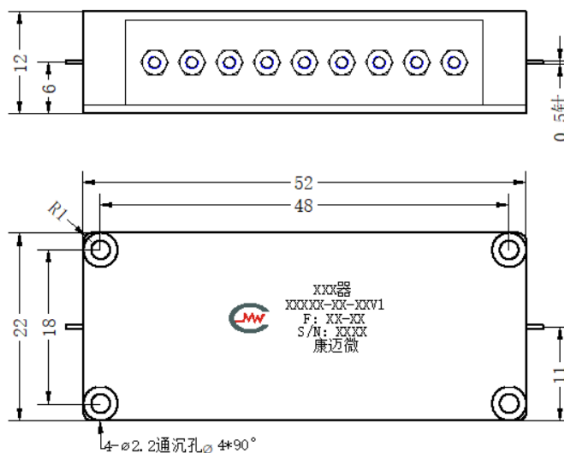

Note

1	Clean the surface of the product, do not soak the product in cleaning solution for cleaning.
2	If the temperature is higher than 125°C, consult with us before ordering.
4	/