


Main specifications

Parameters	Frequ ency	/	Mi n	Typi cal	Ma x	Uni ts
Passband	/	/	25 15	~	26 75	MH z
Passband IL	/	/			2	dB
Rejection	DC- 2505	MHz ≥	50			dB
Rejection	2685- 6000	MHz ≥	50			dB
Passband VSWR	/	/			1.6	

Configuration(mm)

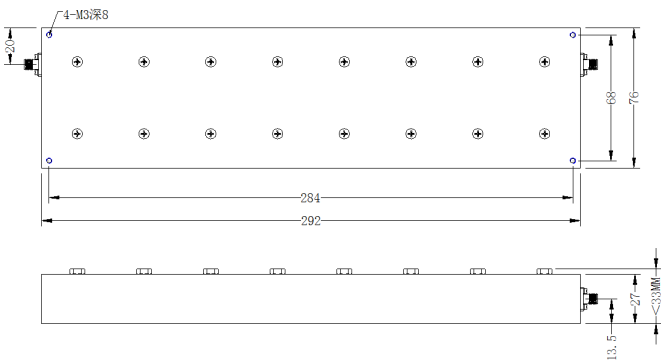

Other parameters

Connector	SMA-F
Impedance	50Ω
Surface	Black baking paint
Power Capacity	50W Design assurance
Operation Temp.	-20~+60°C Design assurance

Note: The specifications and performance data contained in this data sheet are based on tests established by CMW.