

Product features

For waveguide link calibration


Main specifications

Parameters	Min	Typical	Max	Units
Frequency	39.2	~	59.6	GHz


Other parameters

Waveguide model	Rect waveguider
Connector 1	BJ500
Connector 2	BJ500
Surface	Gold-plating
Product shell material	Aluminum
Other	Waveguide quarter-wave

Reference picture



Configuration(mm)

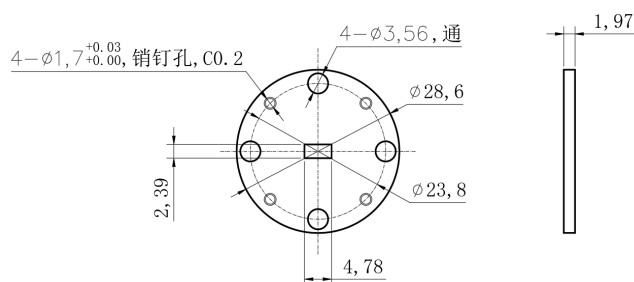

Note: The specifications and performance data contained in this data sheet are based on tests established by CMW.