


Main specifications

Parameters	Frequency	/	Min	Typical	Max	Units
Passband	/	/	16000	~	18000	MHz
Passband IL	/	/			1.5	dB
Ripple	/	/			1.0	dB
Rejection	DC-13600	MHz ≥	65			dB
Rejection	20700-30000	MHz ≥	65			dB
Passband VSWR	/	/			1.5	


Reference picture



Configuration(mm)

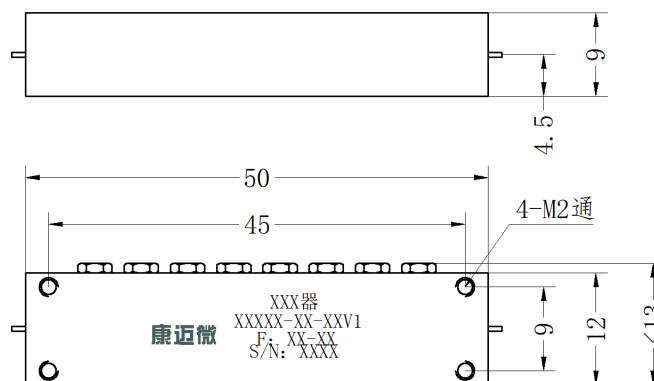

Typical test curve

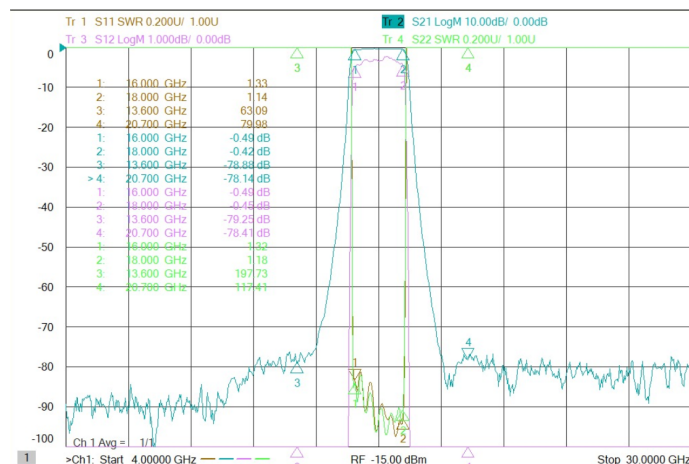

Other parameters

Connector	Pin 0.38mm
Impedance	50Ω
Surface	silver-plate
Power Capacity	5W Design assurance
Product shell material	Aluminium
Operation Temp.	-40~+70°C
Storage Temp.	-55~+85°C Design assurance

Functional diagram

