


Main specifications

Parameters	Freq uency	/	Min	Typi cal	Max	Units
Passband	/	/	2056.8	~	2096.8	MHz
Passband IL	/	/			3	dB
Ripple	/	/			0.5	dB
Rejection	DC-1776.8	MHz $\geq$	75			dBc
Rejection	2076.8 $\pm$ 76.8	MHz $\geq$	30			dB
Rejection	2076.8 $\pm$ 153.6	MHz $\geq$	60			dB
Rejection	2376.8-6000	MHz $\geq$	75			dB
Passband VSWR	/	/			1.5	

Reference picture



Configuration(mm)

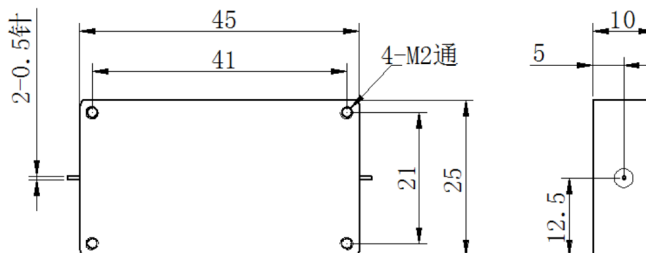

Note

- 1 Clean the surface of the product, do not soak the product in cleaning solution for cleaning.
- 2 If the temperature is higher than 125°C, consult with us before ordering.

Other parameters

Connector	SMA-K detachable, Pin 0.5mm
Connector material	Stainless steel
Impedance	50Ω
Surface	silver-plate
Power Capacity	10W Design assurance
Product shell material	Aluminium
Operation Temp.	-40~+70°C Design assurance
Storage Temp.	-55~+85°C Design assurance

Note: The specifications and performance data contained in this data sheet are based on tests established by CMW.