


Main specifications

Parameters	Freq uenc y	/	Mi n	Typ ical	Ma x	Un its
Passband	/	/	70 50	~	73 50	MH z
Passband IL	/	/			2.0	dB
Rejection	DC- 4000	MH z $\geq$	65			dB c
Rejection	9600- 1500 0	MH z $\geq$	65			dB c
Passband VSWR	/	/			1.5	

Configuration(mm)

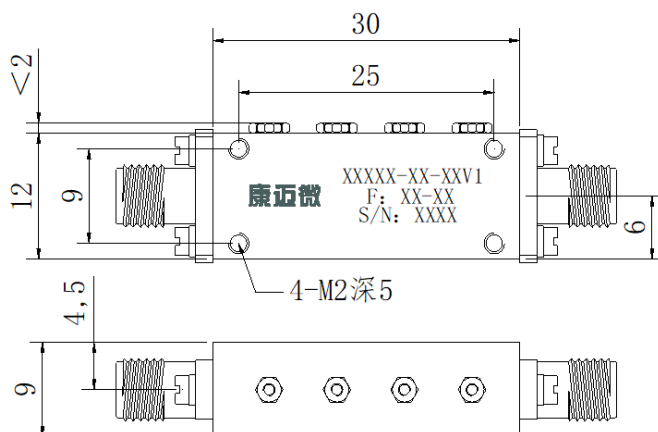

Note

- 1 Clean the surface of the product, do not soak the product in cleaning solution for cleaning.
- 2 If the temperature is higher than 125°C, consult with us before ordering.

Other parameters

Connector	SMA-F Detachable Pin 0.5mm
Connector material	Stainless steel
Impedance	50 Ω
Surface	silver-plate
Power Capacity	10W Design assurance
Operation Temp.	-40~+70°C Design assurance

Functional diagram

