

Main specifications

Parameters	Frequency	/	Min	Typical	Max	Units
Passband	/	/	4.95	~	10.25	GHz
Passband IL	/	/			3	dB
Ripple	any 500MHz	/			1	dB
Ripple	any 200MHz	/			0.6	dB
Rejection	DC-3.8	GHz $\geq$	58			dB
Rejection	11.3-15	GHz $\geq$	58			dB
Passband VSWR	/	/			1.7	


Other parameters

Connector	Pin 0.38mm
Power Capacity	5W Design assurance
Operation Temp.	-40~+70°C Design assurance

Reference picture



Configuration(mm)

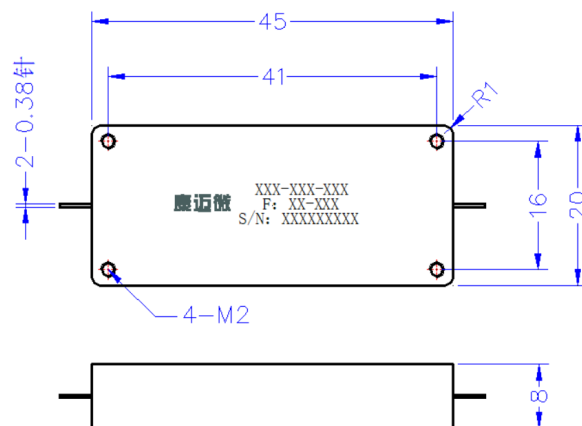

Note

- 1 Clean the surface of the product, do not soak the product in cleaning solution for cleaning.