

Main specifications

Parameters	/	Min	Typical	Max	Units
Stopband F		3447.5	~	3452.5	MHz
Stopband Rej.	$\geq$	40			dB
Passband		DC	~	3437.5	MHz
Passband		3462.5	~	6500	MHz
Passband IL				3	dB
Passband VSWR				1.8	


Other parameters

Connector	SMA-F
Connector material	Housing 304 stainless steel
Impedance	50 Ω
Surface	Black baking paint
Power Capacity	50W Design assurance
Operation Temp.	-10~+50°C Design assurance

Reference picture



Configuration(mm)

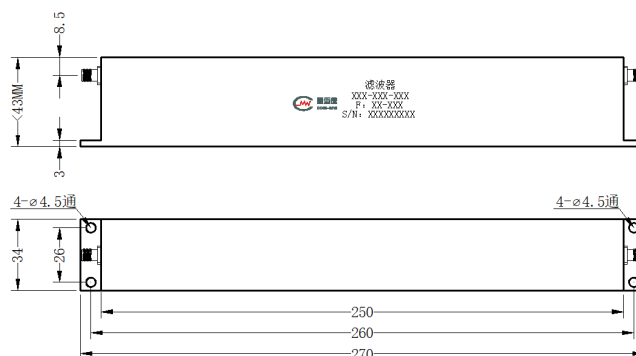

Note

- 1 Clean the surface of the product, do not soak the product in cleaning solution for cleaning.
- 2 If the temperature is higher than 125°C, consult with us before ordering.