

Main specifications

Parameters	Min	Typical	Max	Units
Frequency	3	~	30	MHz
IL			0.1	dB
Coupling	59	60	61	dB
Directivity	20			dB
Main line VSWR			1.1	
Coupled line VSWR			1.1	


Other parameters

Connector	N-F; Coupling port SMA-F
Connector material	Stainless steel
Impedance	50Ω
Surface	White
Power Capacity	2700W Design assurance
Shell Material	Aluminium
Operation Temp.	-30~+70°C Design assurance
Quality Grade	Industrial grade

Port Definition

Input port	IN	---
Output port	OUT	---
Coupling port	C1	---
Isolated Port	C2	---

Configuration(mm)

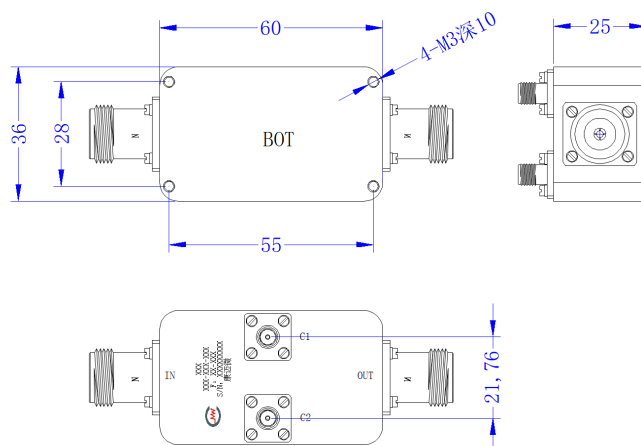

Note

- 1 Clean the surface of the product, do not soak the product in cleaning solution for cleaning.
- 2 If the temperature is higher than 125°C, consult with us before ordering.