


Main specifications

Parameters	Frequency	/	Min	Typical	Max	Units
Passband	/	/	17	~	26.5	GHz
Passband IL	/	/			2	dB
Rejection	DC-16	GHz ≥	40			dB
Passband VSWR	/	/			1.8	


Other parameters

Connector	SMA-K
Impedance	50Ω
Surface	Silver plating
Work Temp.	-40~+70°C Design assurance

Functional diagram

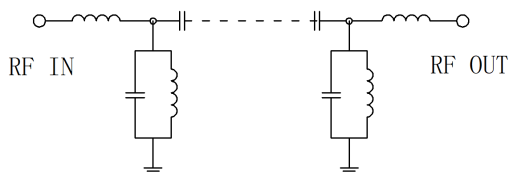

Configuration(mm)

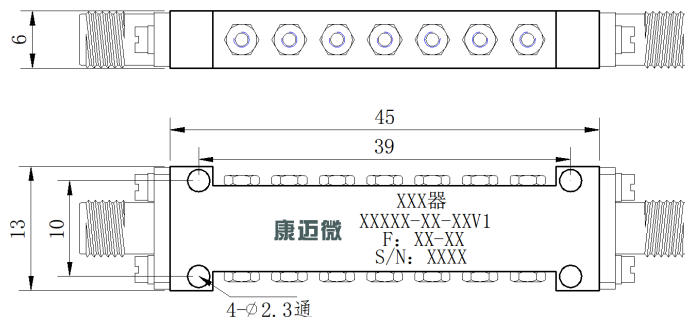

Note

- 1 Please do not wash the product in the cleaning solution.,Please do not wash the product in the cleaning solution.
- 2 If the temperature is higher than 125°C, consult with us before ordering.