

Product features

Broadband, high-power.

Tech specifications

Parameters	Min	Typical	Max	Units
Frequency	DC	~	8500	MHz
IL			2	dB
Isolation	65			dB
VSWR			1.5	

Other parameters

Switch way	1*16 Way
Switching characteristic	Reflective switch
Switch time	20ms
Connector	SMA-K
Connector material	Stainless steel
Impedance	50Ω
Surface	Black
Power Capacity	50W Design assurance
Working voltage	+220V
Operation Temp.	-25~+65°C Design assurance
Quality Grade	Industrial grade
Control port	RJ-45
Switching Lifetime	2 million Cycles
Other	17 RF ports and power switches are placed on the front panel, while the network port and AC interface are placed on the back panel.


Packing list

1	1 host
2	1 AC power cord
2	1 set of test report or user /uploads/kmw-media/dsm8-0-8500-3703/manual/DSM8-0-8500-3703@2025-07-20-08-48-50.pdf

Reference picture



Configuration(mm)

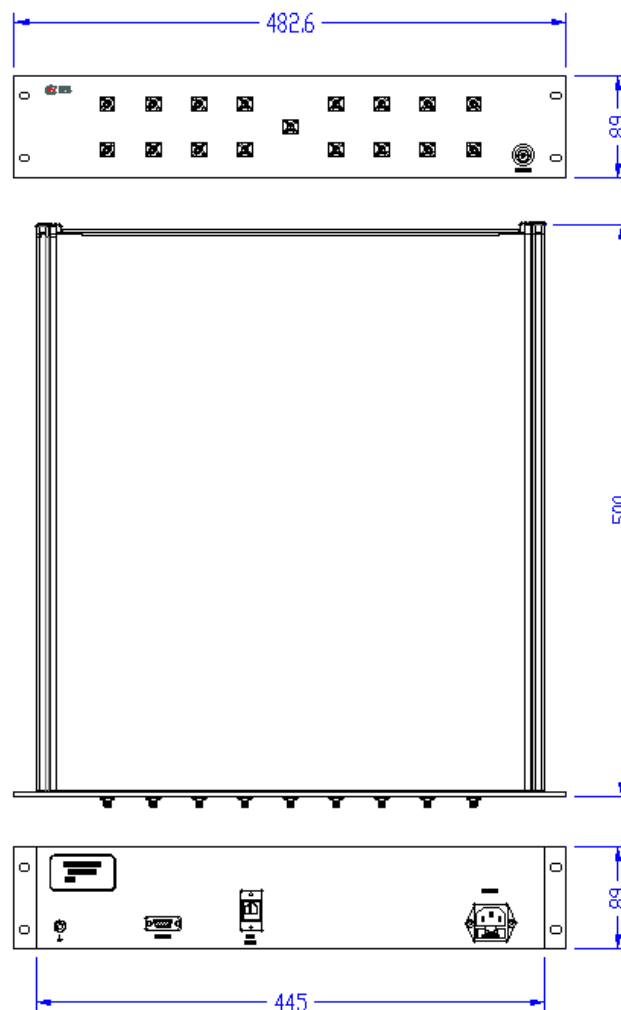

Note

- 1 Clean the surface of the product, do not soak the product in cleaning solution for cleaning.