


Main specifications

Parameters	Min	Typical	Max	Units
Frequency	2.17	~	3.3	GHz

Other parameters

Power	2000W Design assurance
Waveguide model	Rect waveguider
Waveguide shape	Curved waveguide
Connector 1	BJ26
Connector 2	BJ26
Work Temp.	-25~+75°C Design assurance
Storage Temp.	-45~+85°C Design assurance

Configuration(mm)

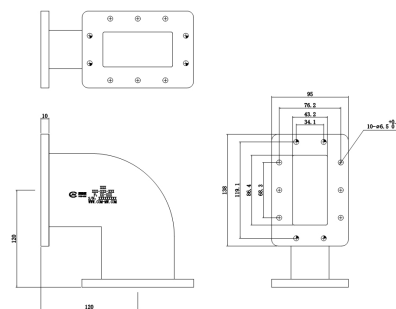

Note: The specifications and performance data contained in this data sheet are based on tests established by CMW.