


Main specifications

Parameters	Frequency	/	Min	Typical	Max	Units
Passband	/	/	DC	~	1661	MHz
Passband IL	1610-1661	MHz			0.4	dB
Ripple	/	/			0.4	dB
Rejection	3220-4000	MHz $\geq$	55			dBc
Passband VSWR	1610-1661	/			1.4	


Other parameters

Connector	Pin 0.8mm
Impedance	50 Ω
Surface	silver-plate
Power Capacity	200W Design assurance
Operation Temp.	-40~+70°C Design assurance
Storage Temp.	-55~+85°C Design assurance
Quality Grade	Industrial grade


Functional diagram

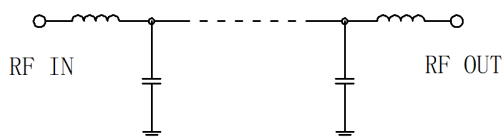

Configuration(mm)

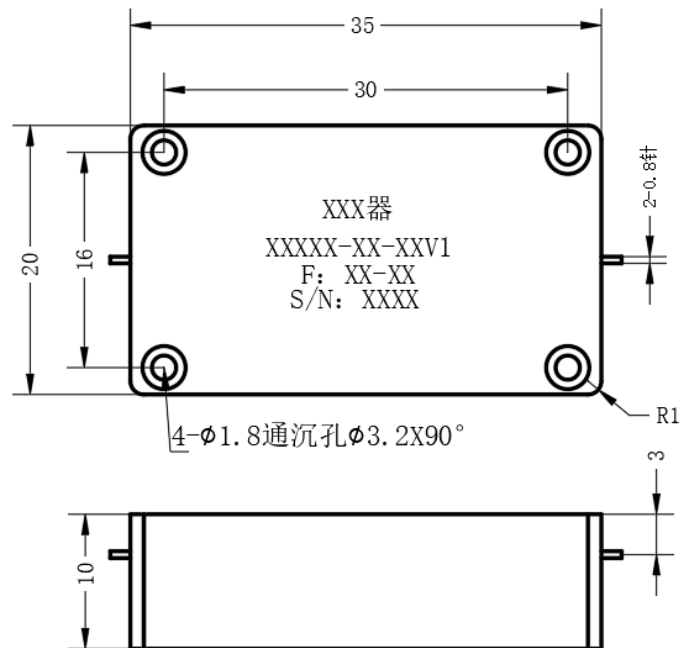

Typical test curve

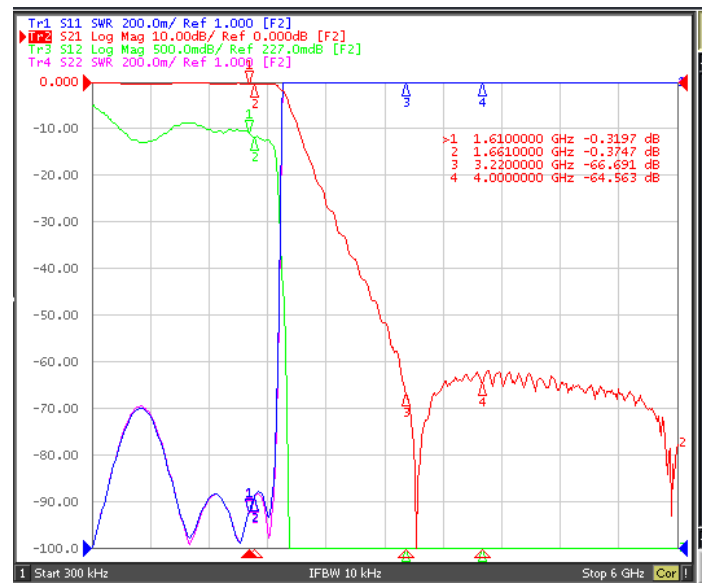

Note

- Clean the surface of the product, do not soak the product in cleaning solution for cleaning.
- If the temperature is higher than 125°C, consult with us before ordering.