

Product features

Broadband, high-power.

The switching life of the switch is greater than 2 million times.

Touch screen display, supporting /uploads/kmw-media/dsm8-0-1g-9436/manual/DSM8-0-1G-9436@2026-07-19-17-21-17.pdf channel switching.

Standard 19 inch chassis.

Main specifications

Parameters	Min	Typical	Max	Units
Frequency	DC	~	1	GHz
IL			0.4	dB
Isolation	70			dB
VSWR			1.40	

Other parameters

Switch way	Choose one from two options in 8 groups
Switching characteristic	Mechanical reflective programmable switch
Switch time	15ms
Connector	SMA-K
Connector material	Stainless steel
Impedance	50Ω
Power Capacity	40W Design assurance
Working voltage	+220V
Operation Temp.	-30~+70°C Design assurance
Quality Grade	Industrial grade
Other	Network port control


Instructions for use

1. Set the PC IP address to 192.168.1.100, subnet mask to 255.255.255.0, and default gateway to 192.168.1.1
2. Select TCP Server as the protocol type, 192.168.1.100 as the local host address, set the local host port to 1000, and 192.168.1.30:1000 as the remote host

Reference picture



Configuration(mm)

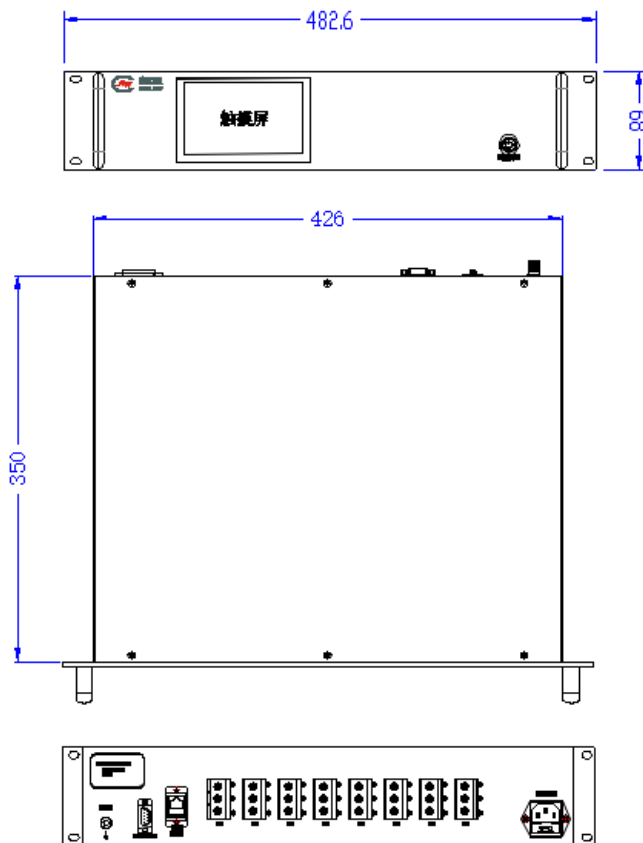

Note

- 1 Clean the surface of the product, do not soak the product in cleaning solution for cleaning.
- 2 If the temperature is higher than 125°C, consult with us before ordering.