


Main specifications

Parameters	Frequency		Min	Typical	Max	Units
Passband			656	~	784	MHz
Passband IL					3.0	dB
Ripple					1.0	dB
Rejection	DC-540	MHz $\geq$	60			dBc
Rejection	540-570	MHz $\geq$	30			dBc
Rejection	850-870	MHz $\geq$	30			dBc
Rejection	870-1500	MHz $\geq$	60			dBc
Passband VSWR					1.6	

Configuration(mm)

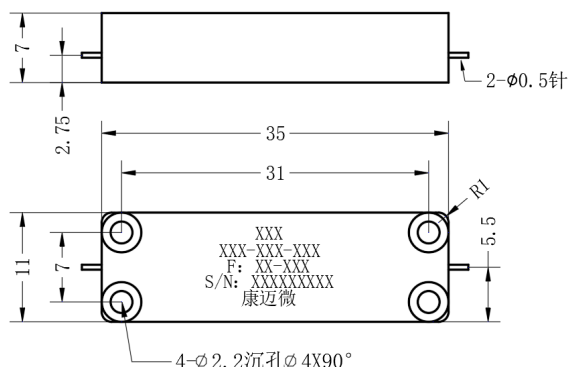

Note

- Please do not wash the product in the cleaning solution.,Please do not wash the product in the cleaning solution.
- If the temperature is higher than 125°C, consult with us before ordering.

Other parameters

Connector	Pin 0.5mm
Impedance	50 Ω
Surface	Silver plating
Power	2W
Product shell material	Aluminium
absolute delay	$\leq$ 15ns
Delay ripple	$\leq$ 5ns
Work Temp.	-40~+70°C Design assurance