

Main specifications

Parameters	Min	Typical	Max	Units
Frequency	18	~	40	GHz
VSWR			1.2	


Other parameters

Power Capacity	100W Design assurance
Connector	Waveguide
Waveguide port	WRD180C24
Surface	Conductive oxidation
Product shell material	Aluminum
Operation Temp.	-40~+85°C Design assurance

Note

When installing the load, it is necessary to consider sufficient heat dissipation space and not install it next to equipment with high heat output.

Power Derating Curve

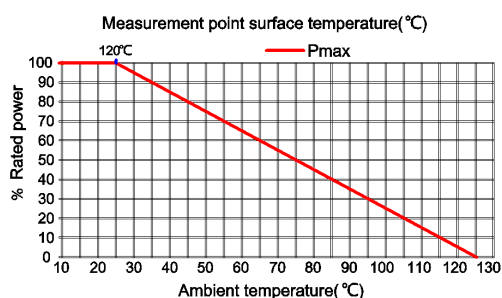

Reference picture



Configuration(mm)

