


Main specifications

Parameters	Frequ ency	/	Min	Typi cal	Max	Uni ts
Passband			15	~	20	MHz
Passband IL					2.5	dB
Rejection	DC-12.5	MHz $\geq$	45			dB
Rejection	22.5-30	MHz $\geq$	45			dB
Rejection	90-100	MHz $\geq$	90			dB
Passband VSWR					1.5	

Configuration(mm)

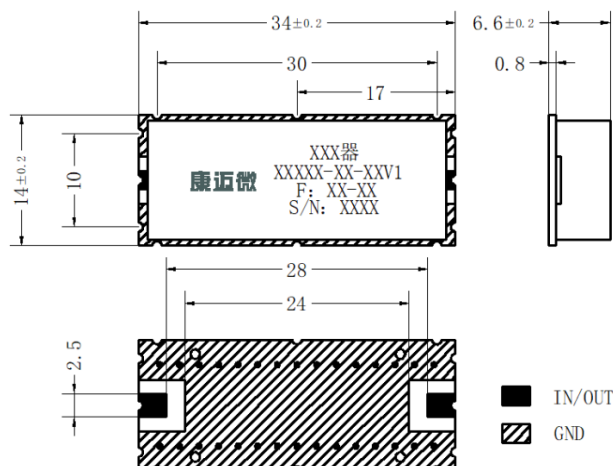

Other parameters

Connector	SMD
Impedance	50 Ω
Power Capacity	1W Design assurance
Operation Temp.	-40~+70°C
Storage Temp.	-55~+85°C Design assurance
Other	三阶节点:>45 (设计保证) 二阶节点:>80 (设计保证)

Note

- 1 Clean the surface of the product, do not soak the product in cleaning solution for cleaning.
- 2 The product supports 190 °C reflow soldering