

Main specifications

Parameters	Frequency	/	Min	Typical	Max	Units
Passband	/	/	3180	~	3370	MHz
Passband IL	/	/			2.5	dB
Ripple	/	/			1.0	dB
Rejection	DC-2990	MHz ≥	60			dB
Rejection	3560-4000	MHz ≥	60			dB


Other parameters

Connector	SMD
Impedance	50Ω
Power Capacity	1W Design assurance
Operation Temp.	-40~+70°C Design assurance
Storage Temp.	-55~+85°C Design assurance


Reference picture



Configuration(mm)

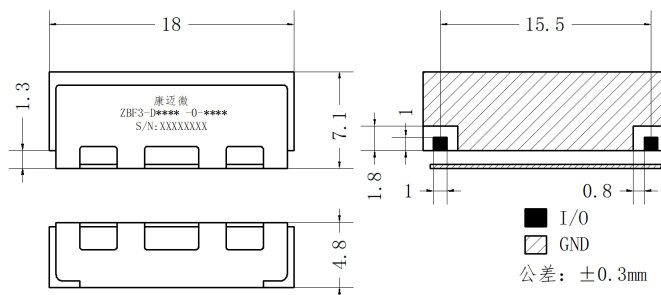

Suggested PCB Layout

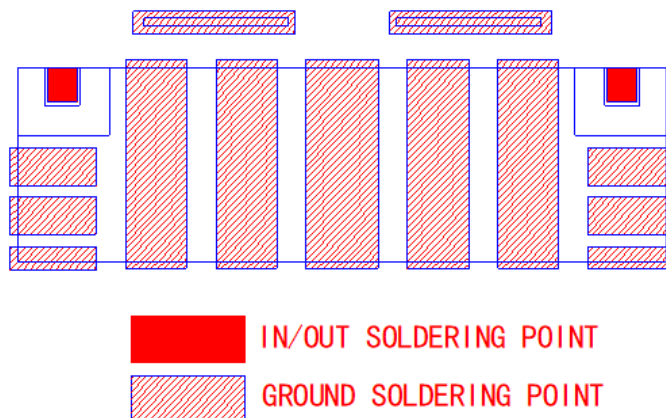

Note

- 1 Clean the surface of the product, do not soak the product in cleaning solution for cleaning.
- 2 The product supports 190 °C reflow soldering