



Reference picture




Configuration(mm)

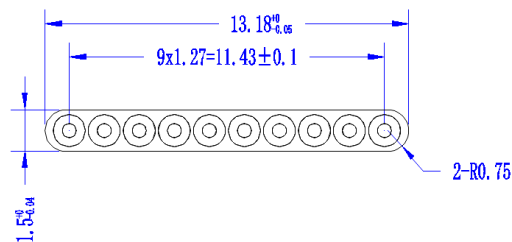

Other parameters

Surface	Gold-plating
Operation Temp.	-55~+125°C Design assurance
Plating thickness	1.5um

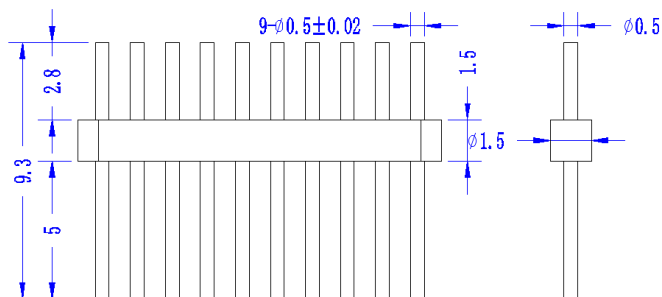

Note: The specifications and performance data contained in this data sheet are based on tests established by CMW.