


Main specifications

Parameters	Frequency	/	Min	Typical	Max	Units
Passband F1	/	/	885	~	889	MHz
Passband F2	/	/	930	~	934	MHz
Passband IL	885-889	MHz			0.6	dB
Passband IL	930-933.4	MHz			2.5	dB
Passband IL	933.4-933.8	MHz			3.2	dB
Passband IL	933.8-934	MHz			4.5	dB
Passband VSWR	/	/			1.25	
Rejection	924-927	MHz ≥	18			dB
Rejection	927-927.6	MHz ≥	12			dB
Rejection	927.6-928	MHz ≥	10			dB
Rejection	935.5	MHz ≥	20			dB
Rejection	935.8	MHz ≥	30			dB
Rejection	935.9	MHz ≥	32			dB

Configuration(mm)

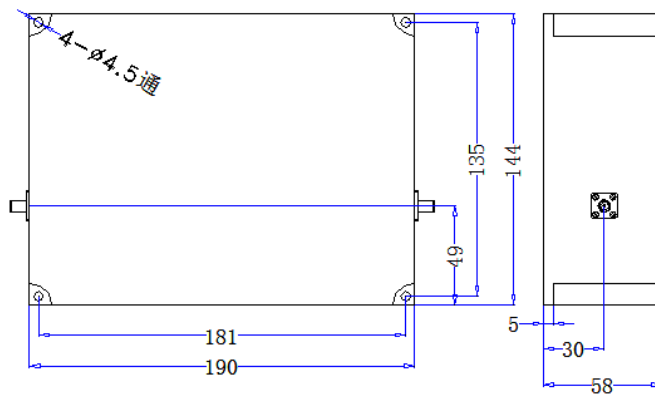

Note

- | | |
|---|--|
| 1 | Clean the surface of the product, do not soak the product in cleaning solution for cleaning. |
| 1 | If the temperature is higher than 125°C, consult with us before ordering. |

Other parameters

Connector	TNC-F
Impedance	50Ω
Surface	Metallic silver gray
Power Capacity	20W Design assurance
Operation Temp.	-20~+60°C Design assurance

Note: The specifications and performance data contained in this data sheet are based on tests established by CMW.