


Main specifications

Parameters	Min	Typical	Max	Units
Frequency	73.8	~	112	GHz

Other parameters

Power Capacity	20W Design assurance
Waveguide model	Rect waveguider
Waveguide shape	Twisted waveguide
Connector 1	
Connector 2	
Surface	Gold-plating
Product shell material	Copper
Operation Temp.	-55~+125°C Design assurance
Storage Temp.	-45~+85°C Design assurance

Configuration(mm)

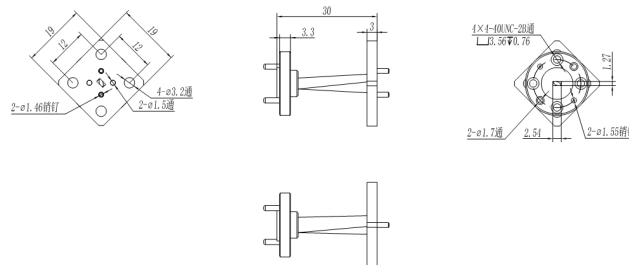

Note: The specifications and performance data contained in this data sheet are based on tests established by CMW.