


Main specifications

Parameters	Frequency	/	Min	Typical	Max	Units
Passband	/	/	824	~	894	MHz
Passband IL	/	/			2	dB
Rejection	DC-754	MHz $\geq$	40			dB
Rejection	964-6000	MHz $\geq$	40			dB
Passband VSWR	/	/			1.5	

Other parameters

Connector	SMA-F or K
Impedance	50 Ω
Surface	Black baking paint
Power Capacity	50W Design assurance
Operation Temp.	-10~+50°C Design assurance

Configuration(mm)

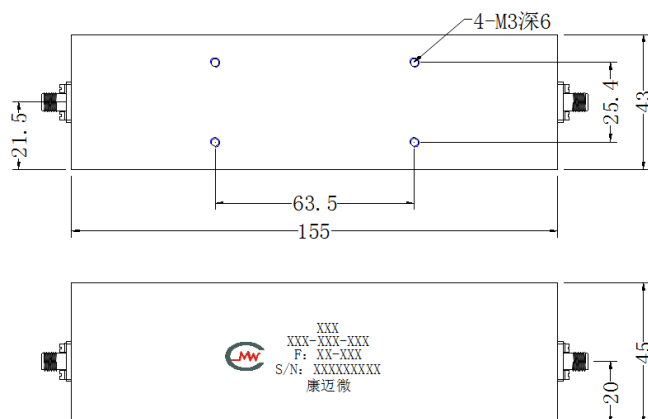

Note

- 1 Clean the surface of the product, do not soak the product in cleaning solution for cleaning.
- 2 If the temperature is higher than 125°C, consult with us before ordering.