




Main specifications

Parameters	Min	Typical	Max	Units
Frequency	0.6	~	6	GHz
Clipping level			14	dBm
IL			1.3	dB
VSWR			1.5	

Other parameters

Power Capacity	50W Design assurance
Impedance	50Ω
Connector	SMA-F detachable Pin0.38mm
Surface	Conductive oxidation
Operation Temp.	-40~+70°C Design assurance
Storage Temp.	-55~+85°C Design assurance


Typical test data




Reference picture



Configuration(mm)

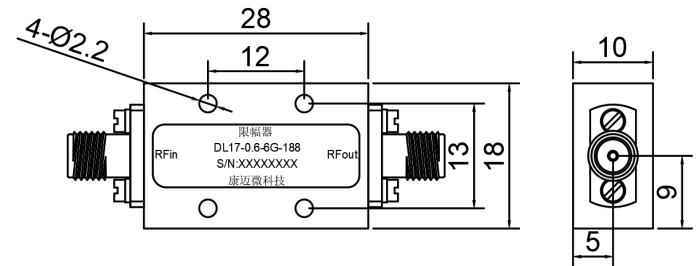

Typical test curve

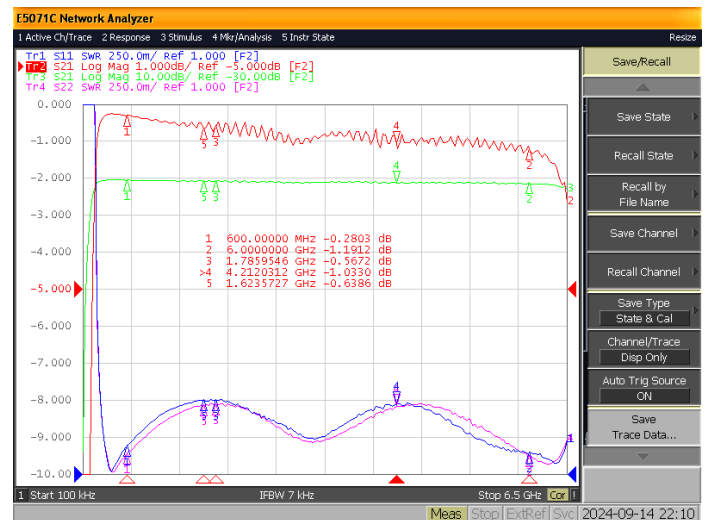

Note

1, Pay attention to the direction of input and output, reverse connection may cause the product to burn out.