



Main specifications

Parameters	Frequency	/	Min	Typical	Max	Units
Passband	/	/	1350	~	1650	MHz
Passband IL	/	/			3.5	dB
Ripple	/	/			1.0	dB
Rejection	DC-1200	MHz $\geq$	45			dBc
Rejection	1800-5000	MHz $\geq$	45			dBc
Passband VSWR	/	/			1.80	

Reference picture




Configuration(mm)

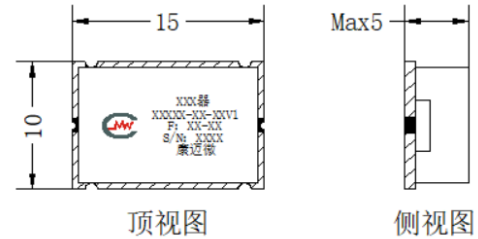


Other parameters

Connector	SMD
Impedance	50 Ω
Power Capacity	1W Design assurance
Operation Temp.	-40~+70°C Design assurance
Storage Temp.	-55~+85°C Design assurance

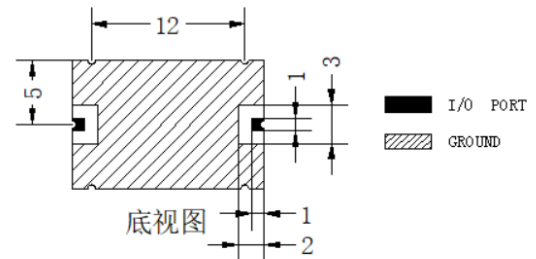

Typical test curve

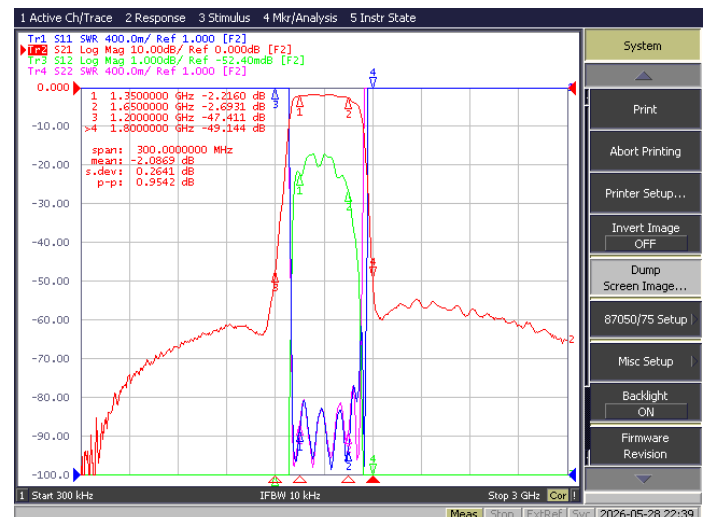

Note

1	Clean the surface of the product, do not soak the product in cleaning solution for cleaning.
2	The product supports 190 °C reflow soldering
3	/