


Main specifications

Parameters	Frequency	/	Min	Typical	Max	Units
Passband F1	/	/	700	~	800	MHz
Passband F2	/	/	860	~	890	MHz
Passband F3	/	/	925	~	960	MHz
Passband VSWR					1.5	
Passband IL					0.5	dB
Band 1 Rejection	860-2400	MHz $\geq$	40			dB
band 2 Rejection	DC-800	MHz $\geq$	40			dB
band 2 Rejection	925-2400	MHz $\geq$	40			dB
band 3 Rejection	DC-890	MHz $\geq$	40			dB

Other parameters

Connector	SMA-K
Connector material	Stainless steel
Impedance	50 Ω
Surface	Black baking paint
Power Capacity	110W Design assurance
Operation Temp.	-40~+70°C Design assurance

Configuration(mm)

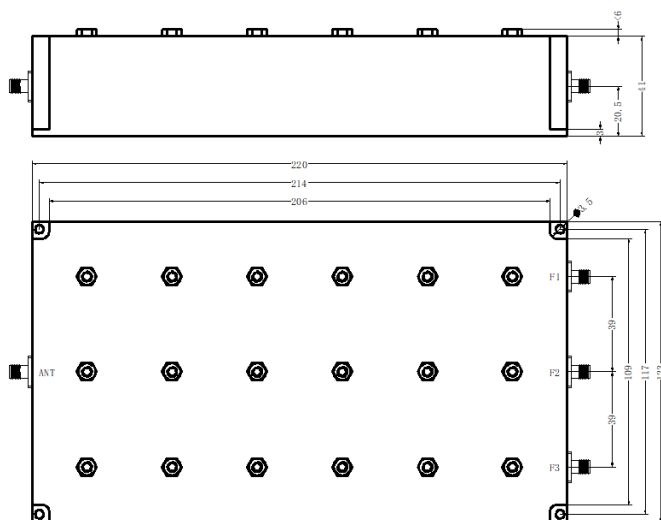

Note

- 1 Clean the surface of the product, do not soak the product in cleaning solution for cleaning.