

Main specifications

Parameters	/	Min	Typical	Max	Units
Stopband F		1447.9	~	1462.9	MHz
Stopband Rej.	$\geq$	40			dB
Passband		DC	~	1437.9	MHz
Passband		1472.9	~	3000	MHz
Passband IL				3	dB
Passband VSWR				1.8	


Other parameters

Connector	SMA-F
Connector material	Housing 304 stainless steel
Impedance	50 Ω
Surface	Black baking paint
Power Capacity	50W Design assurance
Operation Temp.	-10~+50°C Design assurance

Reference picture



Configuration(mm)

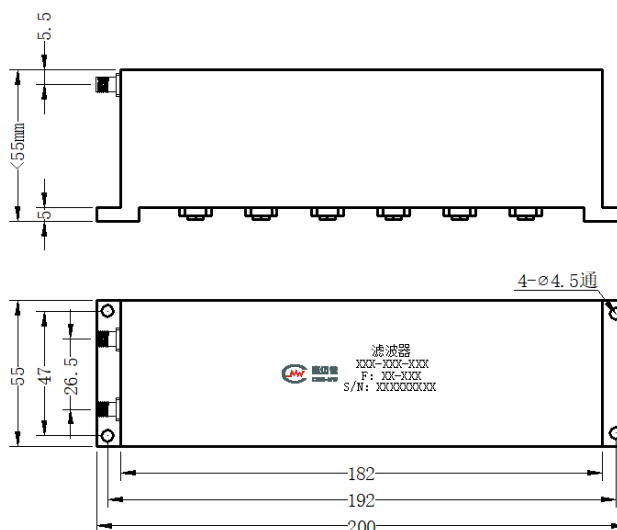

Note

- Clean the surface of the product, do not soak the product in cleaning solution for cleaning.
- If the temperature is higher than 125°C, consult with us before ordering.