


Main specifications

Parameters	Frequency		Min	Typical	Max	Units
Passband			890	~	1700	MHz
Passband IL					1.5	dB
Ripple					1.5	dB
Rejection	DC-743.15	MHz $\geq$	40			dB
Passband VSWR					1.5	

Reference picture



Configuration(mm)

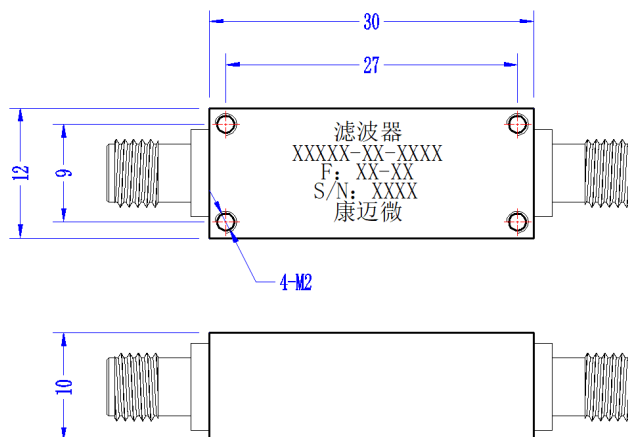

Other parameters

Connector	SMA-F
Connector material	Stainless steel
Impedance	50 Ω
Surface	silver-plate
Power Capacity	2W Design assurance
Product shell material	Aluminium
Operation Temp.	-40~+70°C Design assurance
Storage Temp.	-55~+85°C Design assurance

Note

- 1 Clean the surface of the product, do not soak the product in cleaning solution for cleaning.
- 2 If the temperature is higher than 125°C, consult with us before ordering.

Functional diagram

