


Main specifications

Parameters	Frequency	/	Min	Typical	Max	Units
Passband	/	/	410	~	650	MHz
Passband IL	/	/			1.2	dB
Ripple	/	/			0.5	dB
Rejection	DC-325	MHz $\geq$	25			dBc
Rejection	0.82-2	GHz $\geq$	40			dBc
Passband VSWR	/	/			1.5	

Configuration(mm)

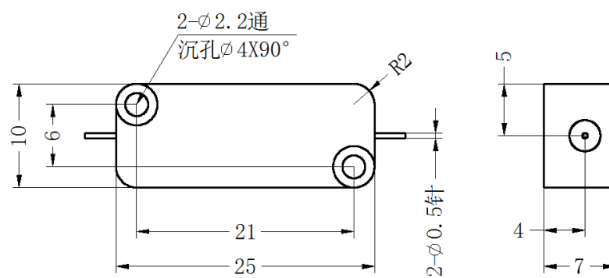

Note

- 1 Clean the surface of the product, do not soak the product in cleaning solution for cleaning.
- 2 If the temperature is higher than 125°C, consult with us before ordering.

Other parameters

Connector	Pin 0.5mm
Impedance	50Ω
Surface	silver-plate
Power Capacity	2W Design assurance
Product shell material	Copper
Phase balance	$\leq \pm 5^\circ$
Operation Temp.	-40~+70°C Design assurance
Storage Temp.	-55~+85°C Design assurance