


Main specifications

Parameters	/	Min	Typical	Max	Units
Stopband F		1940	~	1960	MHz
Stopband Rej.	$\geq$	55			dB
Passband		DC	~	1920	MHz
Passband		1980	~	4200	MHz
Passband IL				1	dB
Knee loss				1.3	dB
Passband VSWR				1.7	

Other parameters

Connector	SMA-K
Connector material	Housing 304 stainless steel
Impedance	50 Ω
Surface	Black baking paint
Power	15W Design assurance

Configuration(mm)

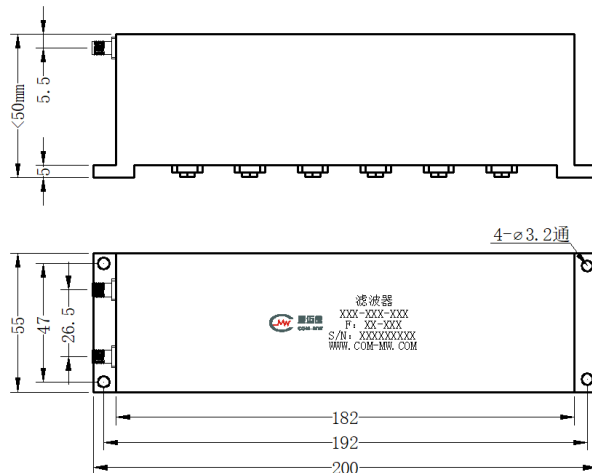

Note

- 1 Please do not wash the product in the cleaning solution.,Please do not wash the product in the cleaning solution.
- 2 If the temperature is higher than 125°C, consult with us before ordering.