

Main specifications

Parameters	Min	Typical	Max	Units
Frequency	21.7	~	33	GHz
IL			0.2	dB
Coupling	39.5	41	42.5	dB
Directivity	18			dB
Main line VSWR			1.1	
Coupled line VSWR			1.4	

Other parameters

Connector	Waveguide
Waveguide port	BJ260 or WR34
Surface	Black baking paint
Power Capacity	300W Design assurance
Shell Material	Copper
Operation Temp.	-40~+70°C Design assurance
Quality Grade	Industrial grade


Port Definition

Input port	IN	FBP260
Output port	OUT	FBP260
Coupling port	C	2.92-F

Reference picture



Configuration(mm)

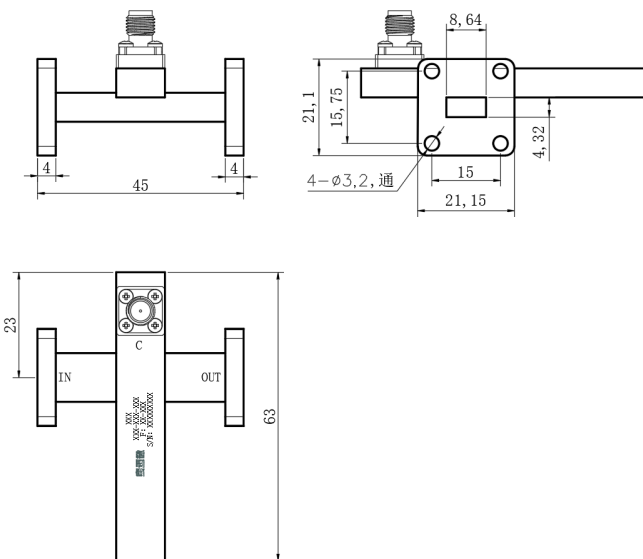

Note

1	Clean the surface of the product, do not soak the product in cleaning solution for cleaning.
2	If the temperature is higher than 125°C, consult with us before ordering.