

Main specifications

Parameters	Frequency		Min	Typical	Max	Units
Passband F1	/	/	1710	~	2690	MHz
Passband F2	/	/	3420	~	13370	MHz
band 1 IL	/	/			0.7	dB
band 2 IL	/	/			1	dB
Passband ripple	/	/				
Passband 1 VSWR	/	/			1.8	
Passband 2 VSWR	/	/			2	
Band 1 Rejection	3420-8070	MHz $\geq$	20			dB
band 2 Rejection	1710-2690	MHz $\geq$	50			dB


Other parameters

Connector	SMA-K
Connector material	Stainless steel
Impedance	50 Ω
Surface	Conductive oxidation
Power Capacity	15W Design assurance
Product shell material	Aluminium
Operation Temp.	-40~+85°C Design assurance


Reference picture



Configuration(mm)

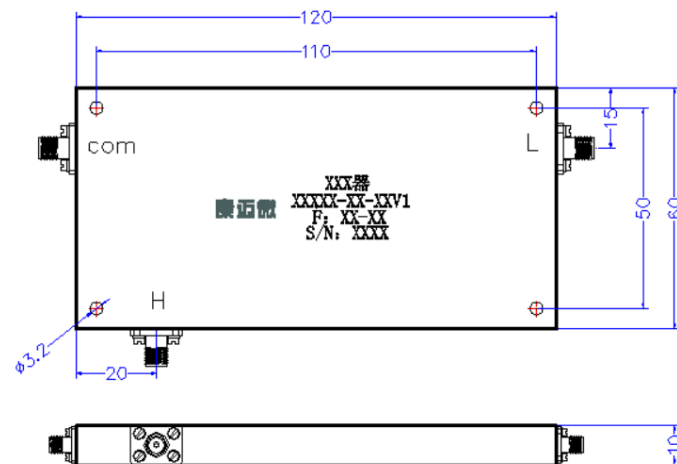


Typical test curve

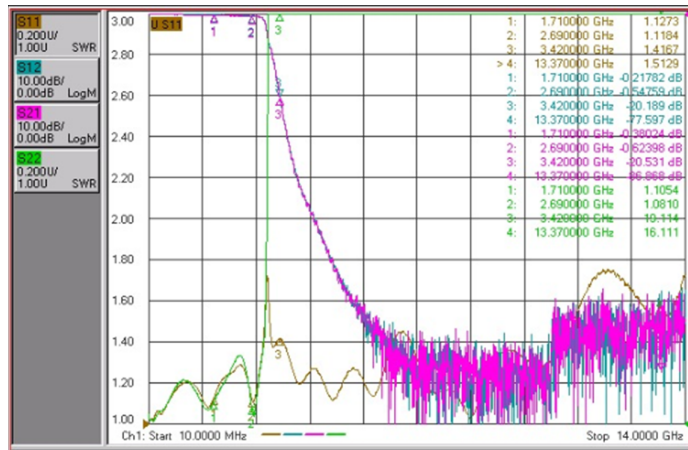

Note

- Clean the surface of the product, do not soak the product in cleaning solution for cleaning.
- If the temperature is higher than 125°C, consult with us before ordering.

Typical test curve

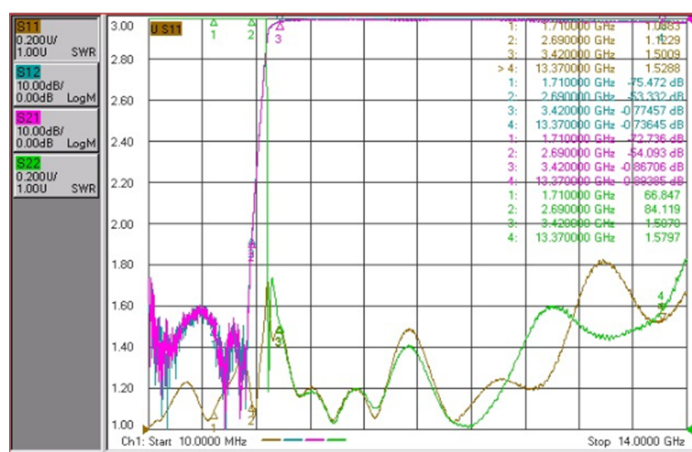

Note: The specifications and performance data contained in this data sheet are based on tests established by CMW.