


Main specifications

Parameters	Freq uenc y	/	Mi n	Ty pic al	Ma x	Un its
Passband	/	/	121 7.6	~	123 7.6	M Hz
Passband IL	/	/			1.5	dB
Rejection	DC~1 207.6	MH z≥	50			dB
Rejection	1247. 6~30 00	MH z≥	50			dB
Passband VSWR	/	/			1.5	

Other parameters

Connector	SMA-K
Connector material	Housing 304 stainless steel
Impedance	50Ω
Surface	Black baking paint
Power Capacity	50W Design assurance

Configuration(mm)

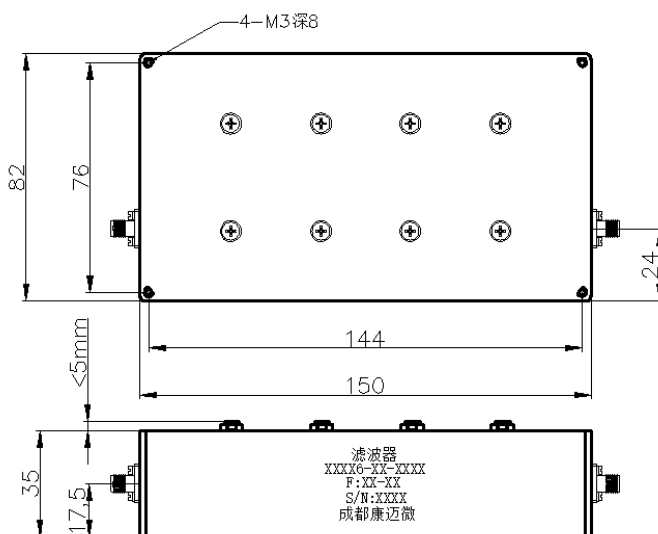

Note

- 1 Clean the surface of the product, do not soak the product in cleaning solution for cleaning.
- 2 If the temperature is higher than 125°C, consult with us before ordering.