


Main specifications

Parameters	Frequency	/	Min	Typical	Max	Units
Passband	/	/	1561.42	~	1589.42	MHz
Passband IL	/	/			1.6	dB
Ripple	/	/			0.5	dB
Rejection	DC-1525	MHz $\geq$	50			dB
Rejection	1625-2500	MHz $\geq$	50			dB
Rejection	1525-1545	MHz $\geq$	30			dB
Rejection	1605-1625	MHz $\geq$	30			dB
Passband VSWR	/	/			1.5	

Configuration(mm)

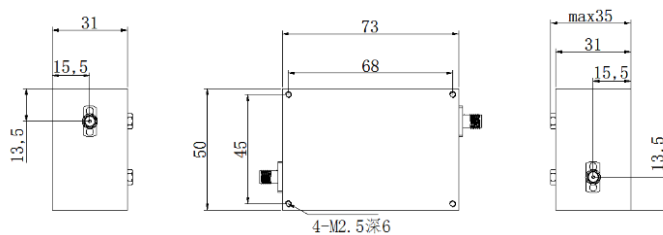

Note

- 1 Clean the surface of the product, do not soak the product in cleaning solution for cleaning.
- 2 If the temperature is higher than 125°C, consult with us before ordering.

Other parameters

Connector	SMA-F or K
Connector material	Stainless steel
Impedance	50 Ω
Surface	Black baking paint
Power Capacity	10W Design assurance
Operation Temp.	-20~+50°C Design assurance

Functional diagram

