


Main specifications

Parameters	Min	Typical	Max	Units
Frequency	21.7	~	33	GHz
IL			0.15	dB
VSWR			1.15	

Other parameters

Power Capacity	300W Design assurance
Waveguide model	Rect waveguider
Waveguide shape	Curved waveguide
Connector 1	BJ260
Connector 2	BJ260
Flange model	FBP260
Surface	silver-plate
Product shell material	Copper
Operation Temp.	-40~+85°C Design assurance

Configuration(mm)

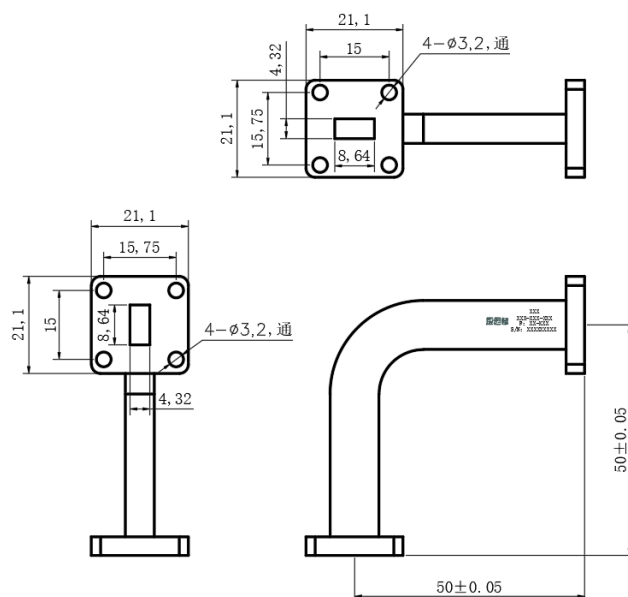

Note: The specifications and performance data contained in this data sheet are based on tests established by CMW.