


Main specifications

Parameters	Frequ ency	/	Mi n	Typi cal	Ma x	Uni ts
Passband	/	/	791	~	821	MHz
Passband IL	/	/			2	dB
Ripple	/	/			1	dB
Rejection	DC-781	MHz $\geq$	50			dBc
Rejection	831-1000	MHz $\geq$	50			dBc
Passband VSWR	/	/			1.4	
Return loss	/	/				dB

Configuration(mm)

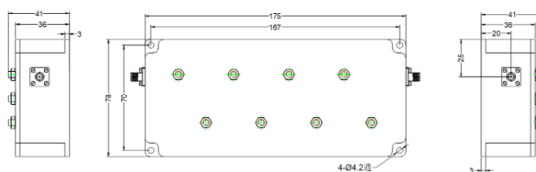

Other parameters

Connector	SMA-F
Impedance	50 Ω
Surface	silver-plate
Power Capacity	20W Design assurance
Operation Temp.	-40~+70°C Design assurance
Storage Temp.	-55~+85°C Design assurance