


Main specifications

Parameters	Min	Typical	Max	Units
Frequency	0.8	~	2	GHz
IL			0.5	dB
Isolation	18			dB
VSWR			1.3	
Amplitude balance			0.5	dB
Phase balance			5	°

Other parameters

Power	500W Design assurance
Phase	90° Hybrid
Connector	N -K
Surface	Conductive oxidation
Product shell material	Aluminium
Work Temp.	-40~+70°C Design assurance

Configuration(mm)

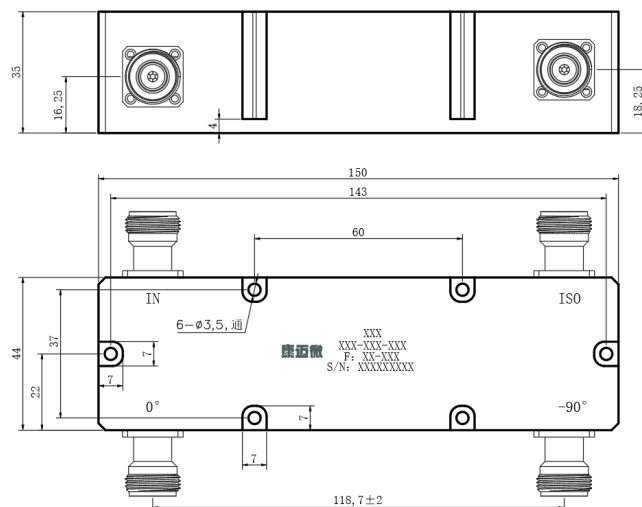

Note

- Please do not wash the product in the cleaning solution.,Please do not wash the product in the cleaning solution.
- If the temperature is higher than 125°C, consult with us before ordering.