

Main specifications

Parameters	Min	Typical	Max	Units
Frequency	DC	~	6000	MHz
IL			20	dB
Isolation	17			dB
Input VSWR			1.6	
Output VSWR			1.6	
Amplitude balance			1	dB
Phase balance			±10	°


Other parameters

Power Capacity	0.5W Design assurance
X-Way	3-way
Phase	0°
Impedance	50Ω
Connector	SMA-K
Connector material	Stainless steel
Surface	Gold plated 0.5um
Product shell material	Aluminium
Operation Temp.	-40~+85°C Design assurance
Quality Grade	Industrial grade

Port Definition

Common port	0
Dispatch Port	1,2,3

Configuration(mm)

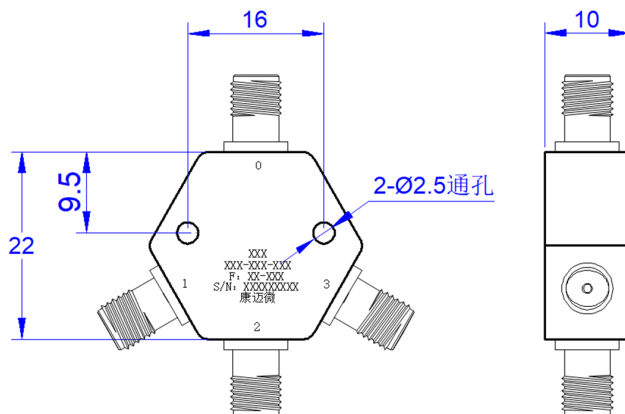

Note

- 1 Clean the surface of the product, do not soak the product in cleaning solution for cleaning.
- 2 If the temperature is higher than 125°C, consult with us before ordering.