


Main specifications

Parameters	Frequency	/	Min	Typical	Max	Units
Passband	/	/	DC	~	600	MHz
Passband IL	/	/			0.6	dB
Ripple	/	/				dB
Rejection	1200-3000	MHz $\geq$	60			dB
Passband VSWR	/	/			1.5	
Return loss	/	/				dB

Other parameters

Connector	SMA-F
Impedance	50 Ω
Power Capacity	10W Design assurance
Operation Temp.	-40~+85°C Design assurance
Quality Grade	Industrial grade


Typical test curve

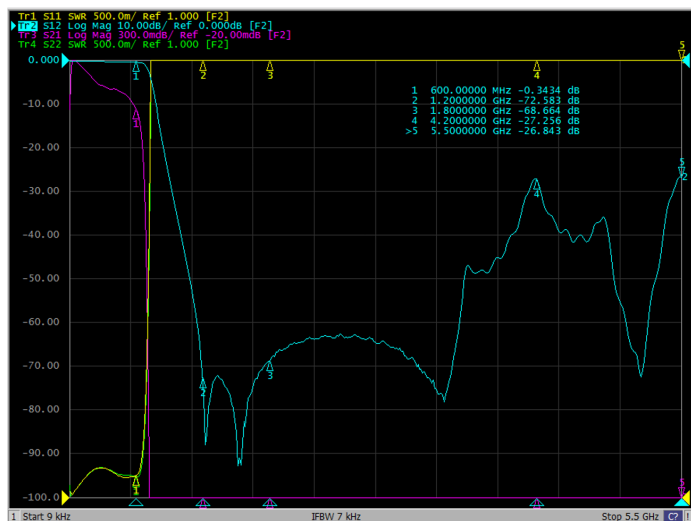

Reference picture



Configuration(mm)

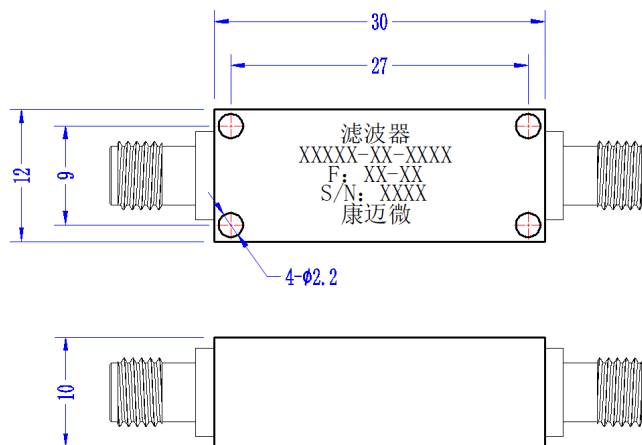

Note

- Clean the surface of the product, do not soak the product in cleaning solution for cleaning.
- If the temperature is higher than 125°C, consult with us before ordering.