

Product features

Low VSWR, high cost-effectiveness.

Main specifications

Parameters	Min	Typical	Max	Units
Frequency	DC	~	40	GHz
IL		0.1		dB
VSWR		1.2		


Other parameters

Impedance	50Ω
Connector	SMP-J
Insulation resistance	≥5000MΩ
Medium withstand voltage	≥300V
shell	Gold plated 1um
Inner conductor	Gold plated 1um
Operation Temp.	-55~+125°C Design assurance
Storage Temp.	-65~+260°C Design Assurance
Other	Semi escapement

Reference picture



Configuration(mm)

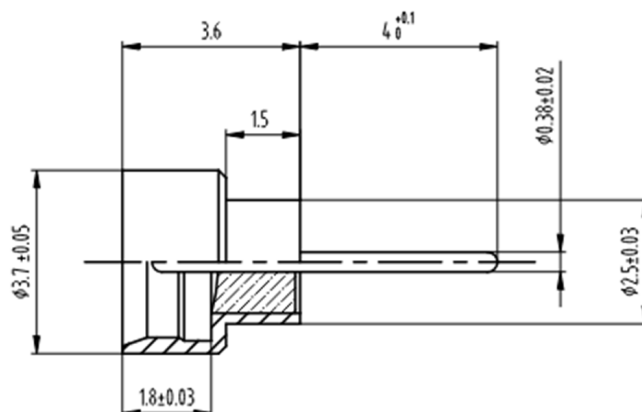

Note: The specifications and performance data contained in this data sheet are based on tests established by CMW.