



Main specifications

Parameters	Frequ ency	/	Mi n	Typi cal	Ma x	Uni ts
Passband	/	/	30	~	51	MH z
Passband IL	/	/			1.6	dB
Ripple	/	/			1.0	dB
Rejection	DC-21	MHz $\geq$	50			dBc
Rejection	60-120	MHz $\geq$	54			dBc
Passband VSWR	/	/			1.5	

Reference picture



Configuration(mm)

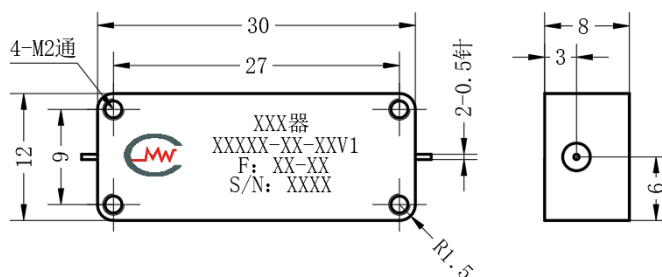

Other parameters

Connector	Pin 0.5mm
Impedance	50 Ω
Surface	silver-plate
Power Capacity	15W
Operation Temp.	-55~+85°C Design assurance
Storage Temp.	-55~+85°C Design assurance

Note

- 1 Clean the surface of the product, do not soak the product in cleaning solution for cleaning.
- 2 If the temperature is higher than 125°C, consult with us before ordering.

Functional diagram

