


Main specifications

Parameters	/	Min	Typical	Max	Units
Stopband F		450	~	457.5	MHz
Stopband Rej.	$\geq$	50			dB
Passband		30	~	440	MHz
Passband		467.5	~	1200	MHz
Passband IL				5.0	dB
Passband ripple				3.0	
Passband VSWR				1.8	
PIM				≤ -100	dBc

Other parameters

Connector	N -F
Connector material	Housing 304 stainless steel
Impedance	50 Ω
Surface	Black baking paint
Power Capacity	50W Design assurance
Operation Temp.	-10~+40°C Design assurance

Configuration(mm)

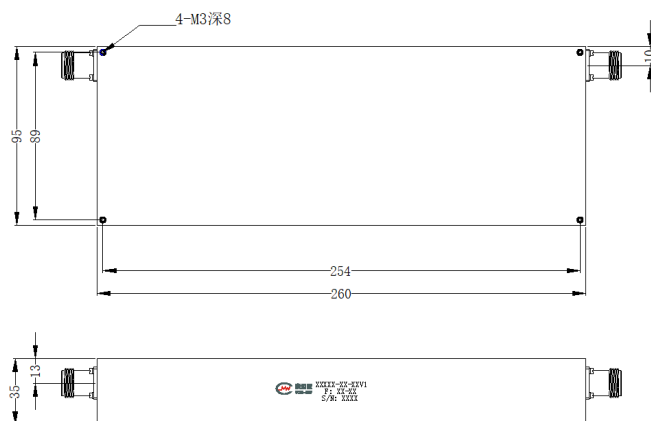

Note

- 1 Clean the surface of the product, do not soak the product in cleaning solution for cleaning.
- 2 If the temperature is higher than 125°C, consult with us before ordering.